




Material:

- Hinge: Zinc die-cast, zinc plated, black texture powder coated or chrome plated.
- Threaded plate: Zinc die-cast, zinc plated.
- Bracket: Steel, zinc plated.
- Pin: Steel, zinc plated.

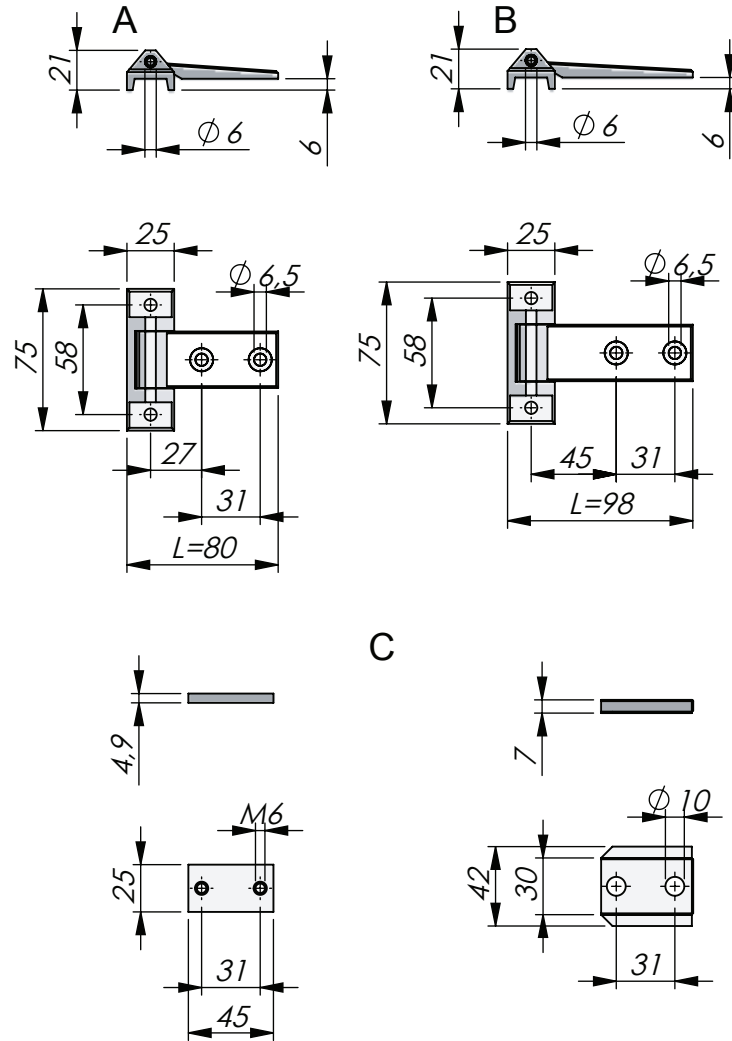

Adjustable in the X- and Y-axis if used with adjustment parts and oversized mounting holes in the door. The hinge is mounted to a threaded plate previously attached to the inside of the door with a mounting bracket, temporarily taped to the door skin. The hinge can also be used without the adjustment parts. Universal right or left mounting. Opening angle: 180°.

Adjustment parts = Threaded plate with bracket (drawing C).

Adjustable Hinge for Insulated Doors - 180° Opening Angle

P/N Zinc	P/N Black	P/N Chrome	L=	Description - adjustment parts (C)	Drawing
321179	321679	321379	80	Included	A+C
32117901	32167901	32137901	80	Not included	A
321180	321680	321380	98	Included	B+C
32118001	32168001	32138001	98	Not included	B